


Huayu Industry Co. Ltd

ANSI CLASS 900

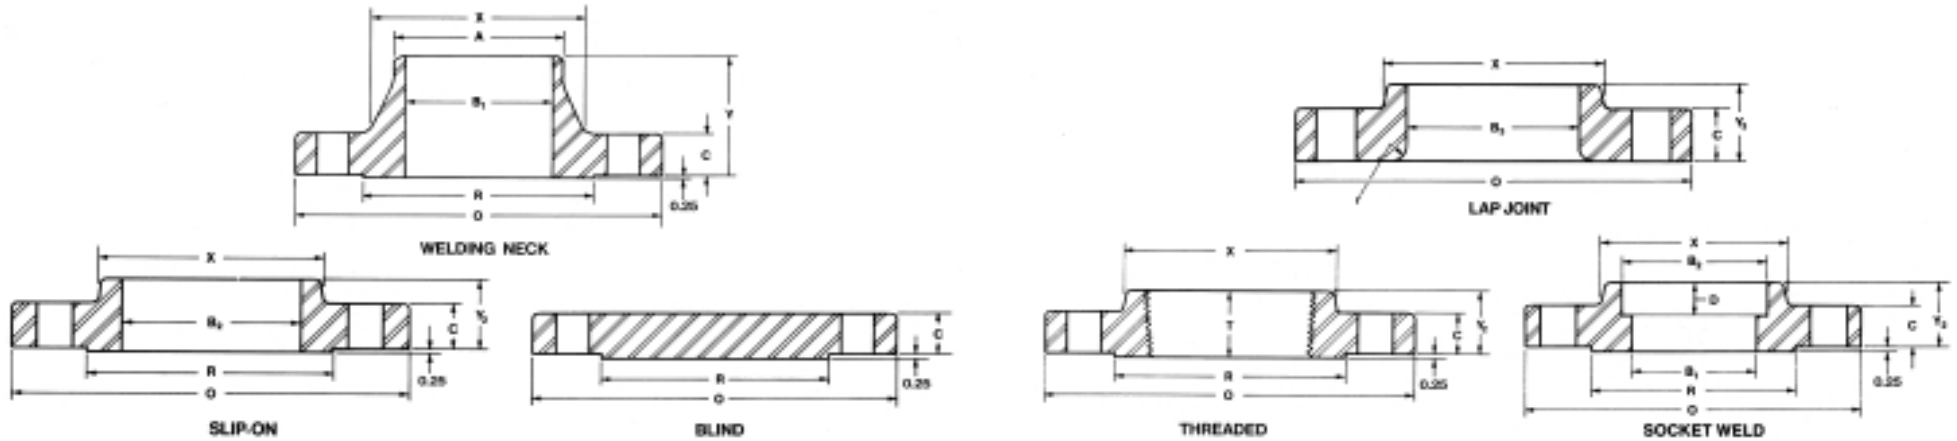

Nominal Size	Common Dimensions				Bore			Length Through Hub			Min. Thread Length D	Dia. Hub at Bevel A	Filet Radius r	Drilling		
	Out-side Dia. O	Thk. C	Raised Face Dia. R	Hub Dia. X	Welding Neck Socket B ₁	Slip-on Socket B ₂	Lap Joint B ₃	Welding Neck Y ₁	Slip-on Threaded Socket Y ₂ , T	Lap Joint Y ₃				Bolt Circle	Dia. Holes	No. Holes
SIZES 1/2" THRU 2 1/2" ARE IDENTICAL WITH CLASS 1500																
3	9.50	1.50	5.00	5.00		3.57	3.60	4.00	2.13	2.13	1.63	3.50	0.38	7.50	1.00	8
4	11.50	1.75	6.19	6.25		4.57	4.60	4.50	2.75	2.75	1.88	4.50	0.44	9.25	1.25	8
5	13.75	2.00	7.31	7.50		5.66	5.69	5.00	3.13	3.13	2.13	5.56	0.44	11.00	1.38	8
6	15.00	2.19	8.50	9.25		6.72	6.75	5.50	3.38	3.38	2.25	6.63	0.50	12.50	1.25	12
8	18.50	2.50	10.63	11.75		8.72	8.75	6.38	4.00	4.50	2.50	8.63	0.50	15.50	1.50	12
10	21.50	2.75	12.75	14.50		10.88	10.92	7.25	4.25	5.00	2.81	10.75	0.50	18.50	1.50	16
12	24.00	3.13	15.00	16.50		12.88	12.92	7.88	4.63	5.63	3.00	12.75	0.50	21.00	1.50	20
14	25.25	3.38	16.25	17.75		14.14	14.18	8.38	5.13	6.13	3.25	14.00	0.50	22.00	1.63	20
16	27.75	3.50	18.50	20.00		16.16	16.19	8.50	5.25	6.50	3.38	16.00	0.50	24.25	1.75	20
18	31.00	4.00	21.00	22.25		18.18	18.20	9.00	6.00	7.50	3.50	18.00	0.50	27.00	2.00	20
20	33.75	4.25	23.00	24.50		20.20	20.25	9.75	6.25	8.25	3.63	20.00	0.50	29.50	2.13	20
24	41.00	5.50	27.25	29.50		24.25	24.25	11.50	8.00	10.50	4.00	24.00	0.50	35.50	2.63	20